



High dynamics fiber laser.

PRODUCTIVITY

What factors affect the productivity of a laser?

The productivity of a laser is affected by **market factors**, i.e. everything the system cannot control, such as batch size, frequency of production changes and mix of materials/thicknesses; and by **technological factors**, which are linked to the features of the cutting system, such as source power, level of automation and digitalization.

The **field of application**, with its specific mix of materials, thicknesses and production strategies, is the key factor in the choice of technology: versatile and transversal, as in the case of the L3, or with high dynamics, like the L5.

Increasingly small batch sizes need **rapid automation** for rapid or masked-time production changes. Salvagnini offers a wide range of solutions: high-performance systems that are modular and compact for managing increased output, as well as systems that are open to downstream processes and designed to be effectively integrated into the factory's production flow.

The range of workable thicknesses and the cutting performance depend on the **power of the source.** To meet different production needs, Salvagnini has introduced a 6kW high power density source and a 10kW source.

The **compass**, an original mechanical system, moves the laser head with accelerations of up to 5g without using linear motors, helping to further increase system **productivity**, while maintaining reduced consumption.

Efficiency and productivity are achieved by eliminating downtime, optimizing the process and simplifying the control system: these objectives can be reached with **digital solutions** that support the operator's work and the **OPS process software** that manages the exchange of information with the ERP in real time and balances the production flow.





How to combine digitalization with simplification?

It is the perfect combination: digitalization has led to the development of simple solutions, which have turned several traditional processes into smart production flows. **OPS**, the **modular software for production management**, receives the production list from the factory ERP/MRP in real time and supports the programming activities, defining priorities, rules and algorithms. OPS therefore helps to **automate the process**, **adding intelligence to the system**. The OPS applications for simplifying workshop management include **PDD**, which supports the operator via the monitor for manual part separation and sorting, and **LPG**, which laser-guides the operator in the pick-up sequence.

Quick and easy high-quality cutting.

What are the main trends in the laser world today?

The market demands cutting-edge systems, with high performance, that are automated yet easy to use, manage and maintain.

The **L5 is an agile laser**: the proprietary functions, the multi-task human-machine interface and the artificial vision systems help operators to effortlessly solve the problems in their day-to-day work.

Salvagnini software solutions effectively connect the laser to the factory ERP and other technologies downstream, guaranteeing the traceability of the parts, supporting the operator in sorting the parts and providing progress feedback in real time to the production manager, whether this is human or virtual.

What are artificial vision systems?

The artificial vision systems implemented on the L5 simplify activities which require time or generate errors and waste. They are **simple solutions that increase the flexibility of the system** and broaden its field of application. **AVS** turns laser cutting into a work station downstream of punching, thus guaranteeing the maximum precision of the cut parts. **SVS** regains scrap and sheet metal leftovers, responding to urgent needs or replacing any waste in downstream machining activities. **NVS** checks that the laser beam is centered, and uses the machine learning algorithms to monitor the state of the nozzle and reduce waste.



Process efficiency.

What are the challenges faced by the companies of tomorrow?

These challenges relate in particular to the **recovery of autonomy and efficiency**. Automating loading/unloading/sorting operations ensures improved cutting system performance and brings benefits to the whole manufacturing chain. Implementing simple, quick office software reduces the risk of turning programming into the bottleneck of production. Integrating ERP/MRP and process software for managing production automates the distribution of information, helping to create a lean, error-proof production environment.

How to regain efficiency in cutting?

Automation plays an increasingly important role: the highest performing laser systems require **loading/unloading/sorting devices** that are equally **high-performing**. These solutions not only guarantee greater efficiency and autonomy for the systems they serve, they also **reduce the impact of labor costs** and **the return-on-investment time**.

Can configuration affect efficiency:

The data from LINKS, the Salvagnini IoT solution, shows that the efficiency of a stand-alone laser system generally **does not exceed 60%.** This parameter varies with configuration: **systems with automation have average efficiency values** that are much **higher**, reaching **80%** for horizontal loading/unloading solutions and even **90%** if we consider the LTWS store-tower.

What is the minimum level of automation for an L5 laser?

The minimum level of automation for the L5 laser is the CPE device, the ultra-rapid electrical pallet changer. The raw material always passes above the material that has already been cut, preventing any scrap from previous machining being deposited on the sheet metal. Integration with automation systems helps to fully exploit the high dynamics of the compass to achieve extremely high productivity and process efficiency as well as significant reliability in unmanned jobs.

How to increase the autonomy of a laser system and reduce bottlenecks?

The LTWS store-tower has automated loading/unloading, an enabling factor for increasing the autonomy of the cutting system. It ensures **different materials and thicknesses are available** for just-in-time production, **reducing waiting times** for sheet metal sourcing, and operator dependency. In contexts marked by low volumes and rapid production changes, LTWS is a winning choice.

Automation, autonomy and value for money: which to choose?

The LTWS store-tower offers even greater performance when equipped with a **sorting device**: the automatic MCU or the manual TN. The store-tower manages different materials, thicknesses and sizes, reducing waiting times and making loading/unloading extremely fast: just 50 seconds. STORE, the store control software, is able to identify the loading trays, once emptied, as trays on which to stack the cut material, thus increasing operational autonomy.



Experience and innovation. Simple to use Proprietary functions such as TRADJUST, the simple and intuitive multi-task interface, together with great and cressibility, the portable terminal on board the machine, the artificial vision systems and the part tracing and

Automation

Storage and automatic loading/unloading/sorting devices increase the autonomy of the system, regaining efficiency both in individual processing steps and throughout the production process, eliminating bottlenecks and reducing the impact of labor costs.

Process efficiency

Advanced technical solutions, full control of the process with cutting-edge sensors, digitalization and the OPS software for real-time production management, eliminate low added-value operations, eliminating downtimes and reducing the cost per part, thus increasing factory performance.

High dynamics and productivity

The compass is a winning solution for nest cutting, where the optimized positions of the parts require fast but very short head movements and precision cutting. Parameter modulation, the proprietary algorithms that control the kinematics, full process control and advanced sensors help to improve overall efficiency.

salvagnini

The result of extensive experience in the field.

Salvagnini was **one of the first companies in the world** to invest in fiber technology. The L5 comes from this long-standing tradition: it is a versatile, productive solution, with **reduced consumption** and **competitive running costs**, that respects the environment, humans and their work.

identification solutions, allow operators to effortlessly solve any problems they come across in their day-to-day

work, making the L5 agile and easy to use.

Two versatile models with working ranges from 118.11" to 157.48" in length: cutting has never been easier!

Unique solutions for today's production.

AIRPLANE STRUCTURE

Salvagnini has patented a **load-bearing beam structure**, with a lightweight **airplane manipulator**, which offers many advantages: high rigidity, rapidity, positioning precision and accessibility to the whole worktable.




ADVANCED COMPASS

The head is coupled with the compass, a strong mechanical structure with a carbon fiber arm hooked to the machine airplane structure, which guarantees high precision even in the most aggressive cutting mode. With reduced inertia, using only rotary motors, the compass moves the head on the XY plane with high dynamics, reaching 5g accelerations on short movements. The compass is controlled by a specific algorithm, integrated into the proprietary numerical control.

SALVAGNINI LASER HEAD

The L5 has a **single optical head** that cuts the whole range of workable thicknesses with the **highest quality**. Production changes are extremely rapid, because **no adjustments are necessary**. The patented **DRY-COOLING** technology actively controls the temperature of the optics.

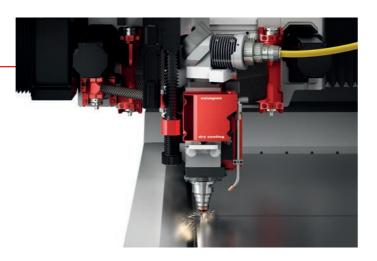

Intelligent design, intuitive and easy-to-use interface.

FACE is the Salvagnini human-machine interface for the whole product range.

It reduces the time required for interaction, as each function is immediately clear and available in just a few clicks.

It is used to control production progress, dynamically manage the production lists, simulate the cutting sequence in real time, and schedule production stops and restarts. It offers support for diagnostics with EasyData2.0.

It simplifies the workflow. The central position of the touch-screen monitor also guarantees **total control over all operations**, ensuring full visibility of both the cutting area and the pallet changer. The TM portable terminal makes it easier to perform the main operations in front of the machine.

Operator **ergonomics** and **easy accessibility** are also guaranteed by the motorized vertical door on the long side, that offers rapid accessibility to the whole work table.




ADAPTABLE CUTTING FUNCTIONS

The **Standard**, **PowerCut** and **DynamicCut** cutting functions allow the operating mode best suited to each production to be chosen. They are easy to activate: **Standard** guarantees greater safety in unmanned manufacturing; **PowerCut** ensures increased reactivity and operational speed, while the more aggressive **DynamicCut** improves performance on medium-thin sheets by making the most of machine dynamics.

TRADJUST: OUR EXPERIENCE AT YOUR SERVICE

The **TRADJUST** function, integrated into the proprietary Salvagnini control system, is used to **automatically modulate the cutting parameters** according to the trajectories. It makes the L5 easier to use, because it employs a single cutting parameter for each material and thickness, regardless of the size of the cutting profile.

Advanced control and process efficiency solutions.

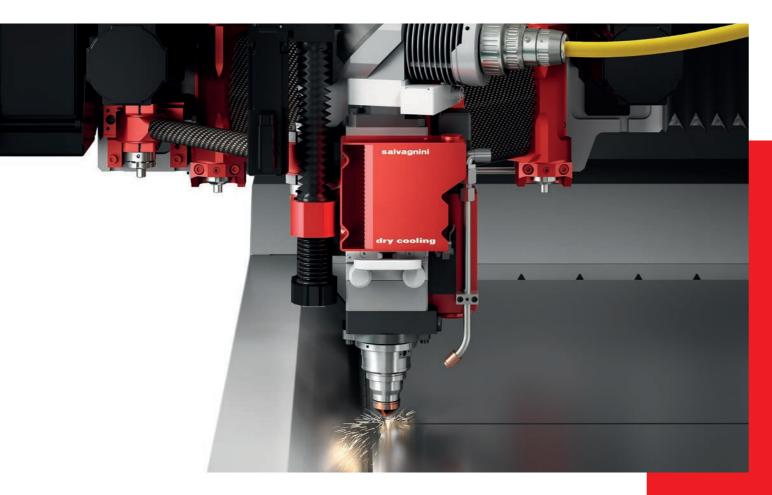



The **automatic nozzle changer**, with nozzle-holder magazine, increases the autonomy of the L5 in unmanned production.





APC2

The **adaptive process sensor** monitors piercing in real time, for greater speed and higher quality. It also checks for any cutting losses, and in the event of a fault, stops the process and resumes it with suitably remodulated parameters. It is also used to automatically search for the focal length.



ACUT

L5 is natively set up for cutting with nitrogen and oxygen. The **ACUT option** extends the possibilities of the L5 and allows **cutting with compressed air**, if suitably treated. Productivity is similar to cutting with nitrogen, but with much lower costs.



AQM/APM

These are turnkey devices that are complementary to ACUT and connect directly to the factory pneumatic supply or to a compressor upstream of the system. AQM filters the air, while APM ensures the pressure values required for the cutting process.








Artificial vision application that acquires the image of a sheet metal leftover positioned on the worktable and transforms it into a dxf to be used as the starting format for a new nest.



SVS is an option of STREAMLASER on machine, for speeding up the management of urgent jobs or replacing any waste in downstream machining.

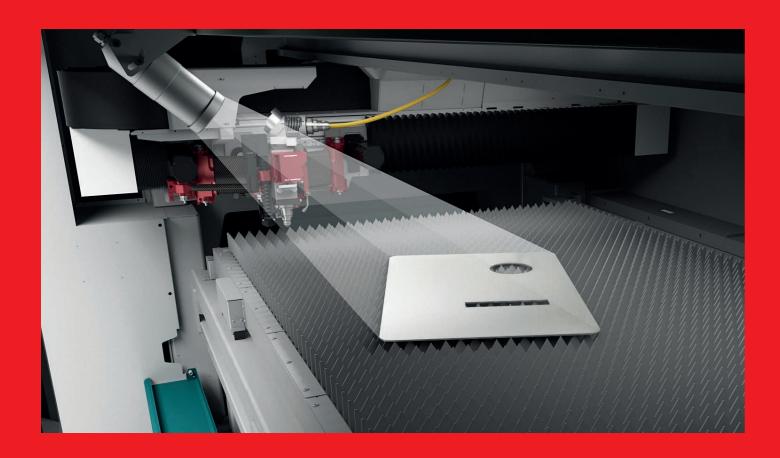

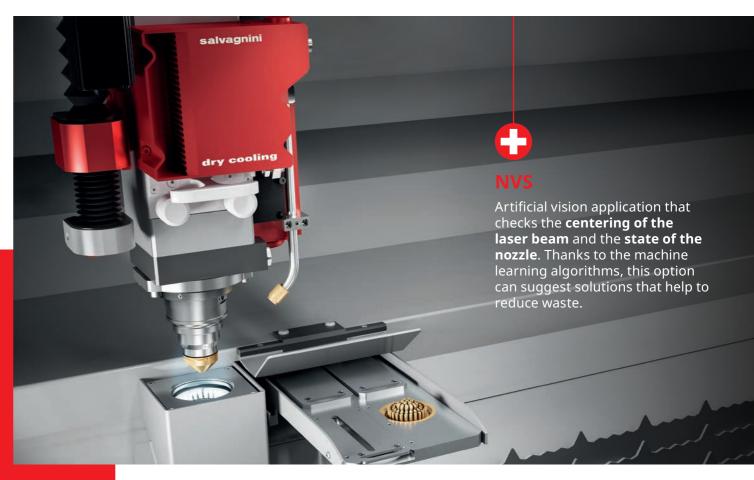

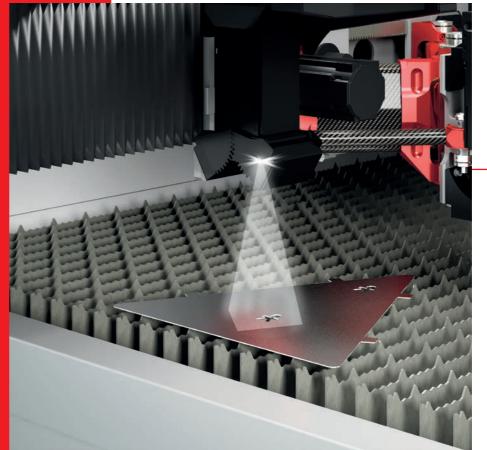



AVS

Artificial vision application that speeds up the centering of the metal sheet and allows previous machining operations to be used as references for positioning it, with no restriction on shape.





Technical data

MODELS						
	L5-30	L5-40				
X Y worktable (in)	120x60	160x60				
Z axis stroke (in)	3.94	3.94				
Maximum XY speed (ipm)	6141	6141				
Precision ¹						
Position accuracy Pa (in)	0.003	0.003				
Average position range Ps (in)	0.001	0.001				

FIBER SOURCES									
	2000 W	3000 W	4000 W	6000 W	8000 WE*	8000 W	10000 W		
Cutting capacity (maximum thickness)²(in)									
Steel	0.591	0.787	0.787	1	1	1	1		
Stainless steel	0.394	0.472	0.591	0.787	1	1	1.181		
Aluminum	0.315	0.394	0.591	0.787	1	1	1.181		
Copper	0.197	0.315	0.315	0.315	0.394	0.394	0.394		
Brass	0.197	0.236	0.315	0.315	0.394	0.394	0.394		
Minimum thickness (in)	0.020								
Consumption (in kW)									
Maximum electricity consumption (in kW) ³	16	18	21	28	28	34	42		
Average electricity consumption ⁴	11	12	13	16	16	20	24		

¹Measurement calculated according to VDI3441 on maximum axis lengths.

²Cutting quality on limit thicknesses may depend on geometries required, material quality and system operating conditions.


At limit values, burrs may be present on the lower edge of the cut. These values are for the Salvagnini reference materials.


³ Maximum consumption calculated on the standard system configuration (machine, source, chiller, fume extractor), in 3 cutting cycles on mild steel from 1/32"-15/64" in. ⁴ Average consumption calculated on the standard system configuration (machine, source, chiller, fume extractor), in 3 cutting cycles on mild steel from 1/32"-15/64" in. ^{*} High efficiency version.





In the laser world, automation is playing an increasingly key role: on the one hand, cutting speeds risk turning loading and unloading into hazardous bottlenecks, and on the other hand, automation can help to reduce the impact of labor costs. **The loading/unloading and sorting connections satisfy all automation requirements**: from stand-alone operation, to integration in flexible cells or in automatic lights-out factories.





Salvagnini offers different scalable loading/unloading automation solutions:

the CPE pallet changer for manual loading-unloading is used for rapid pallet exchange; the raw material always enters above the outgoing cut sheet;

the ADB connection automatically picks the sheet up from a pack in masked time;

the ADLU and ADLL devices automate the loading of the sheet metal and the unloading of the cut sheets, with very rapid cycle times; they also eliminate the intermediate handling that is usually done by the operator, and they are designed for integration with the MCU;


the LTWS and LTWS Compact store-towers are designed for unmanned loading, unloading and storage of materials; they are compact in size and have extremely short **cycle times** of up to 50 seconds; the loading and unloading devices are independent, increasing process efficiency even in extremely rapid cutting programs; autonomy is quaranteed by the availability of several materials, and by the STORE software, which identifies the empty loading trays as trays on which to stack the machined material;

the MV tray store with picker-crane allows unmanned operation, offering high autonomy in the management of sheet metal and semi-finished or finished parts.




SORTING SOLUTIONS

- The TN manual sorting device helps operators to separate the cut parts from the skeleton, allowing cutting and sorting to proceed in parallel.
- The MCU automatic sorting device is used to easily stack parts of different shapes, sizes and weights. In addition to the standard sorting strategy, MCU can work in multi-gripping mode, picking up several parts in sequence with the same gripping device, or in double-picking mode, reducing the time needed to pick up the parts. MCU makes the operators' work easier, and **drastically reduces the waiting times** between the end of cutting and the start of the next production step. It can make single parts available for downstream processing in urgent cases or, if necessary, physically integrate the laser with panel benders or robotized bending cells downstream.
- The **CM software**, combined with the MCU, is used to automatically define the grips on the parts, automatically generating the unloading sequences and positioning the stacked parts in the unloading areas. The interface is easy to use, allowing manual interaction and fine tuning. CM can be used both in the office and on board the machine.

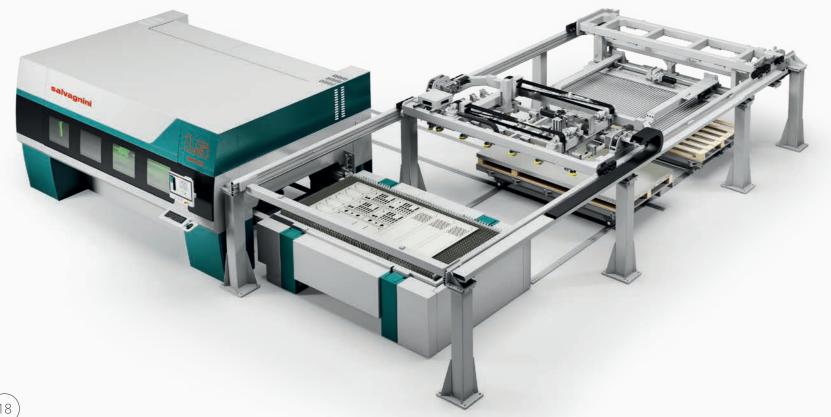

The software ecosystem.

STREAM, Salvagnini's answer to the modern industrial context, is a programming suite that improves reactivity and reduces costs, operating errors and process inefficiencies.

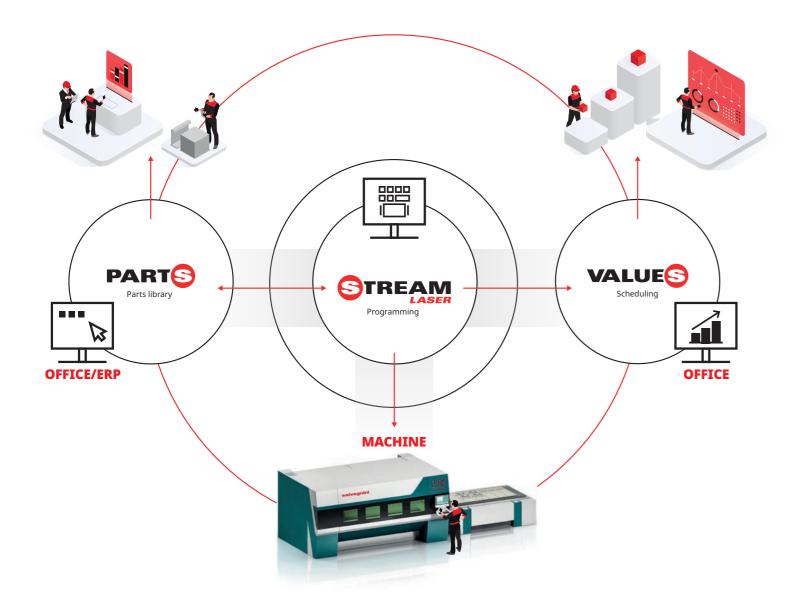

It is the integrated environment for managing all activities in the office and on the shop floor; it constitutes a single point of access for all technologies, from cutting to bending; it is capable of meeting all planning, programming, production,


management, control and optimization needs throughout the production process. STREAM can also be used to **calculate costs**, including those for upstream and downstream processes where necessary.





STREAMLASER is the programming software for generating cutting programs; it includes the following functions:

- CAM: creates or allows editing of the 2D model, automatically defines lead-ins and cutting sequences, and calculates the processing path, allowing for manual intervention.
- **Nesting**: automatically, semi-automatically or manually optimize sheet composition starting from a list of parts to be produced.
- **Reverse engineering**: generates the drawing starting from the program.
- **OPTI**: optimizes the use of the sheet and repeatability of the diagrams, minimizing the variability of the nesting layouts.
- **Parametric shapes**: easily and quickly prepares programs and prototypes without starting from a drawing.

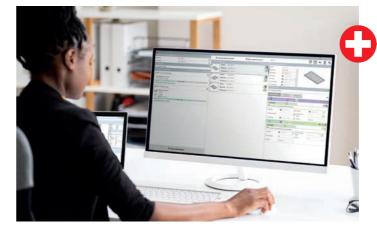



PARTS is the software used to manage the whole database of products and parts:

- it classifies the elements according to common or customized categories;
- it defines the production flows for each part to be machined;
- it is integrated with the CAM software.






VALUES is the software which provides an accurate estimation of production costs.

It allows calculation not only on the basis of the individual technology, but also on that of the entire process, including upstream and downstream machining where necessary.



Tools for digital factories. HANDLING OF **SEMI-FINISHED PARTS** ORDER MANAGEMENT DOWNSTREAM ACTIVITIES **PROGRAMMING** AND CONTROL

Digital transformation and **Industry 4.0** are key topics for staying competitive on the market. When adopted, they can implement and manage complex, integrated, highly automated high-performance systems, and can help to develop simple solutions that require no structural changes to the production layout, making the world of smart manufacturing much more accessible.

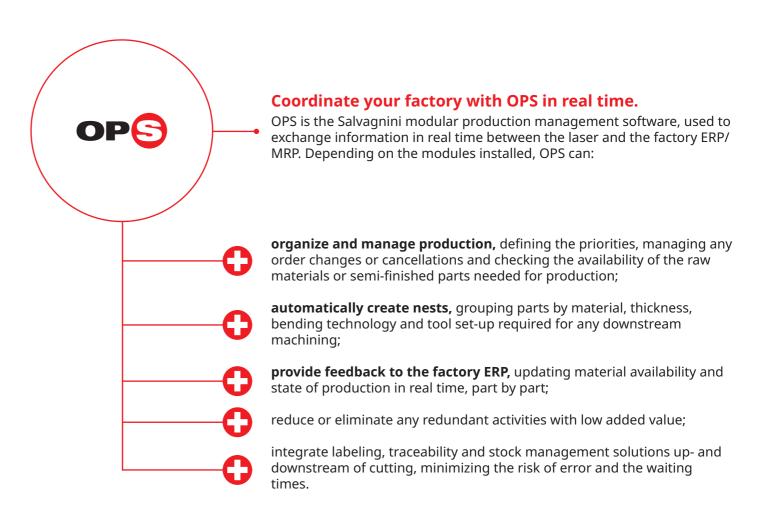

OPS can take independent decisions, according to a production logic – or a mix of multiple production logics – designed to meet the customer's production needs, transformed into an algorithm. It is also used to exchange information between different technologies, such as the components of an FMC cell, so as to optimize production flows and

increase productivity. The digital connection between

different systems, and the easy-to-use software solutions, also help to maximize the production capacity available, increasing technology flexibility and overall factory efficiency. The OPS applications for simplifying workshop management include PDD, which supports the operator via the monitor for manual part separation and sorting, and LPG, which laser-guides the operator in the pick-up sequence.

LINKS: IoT to serve efficiency

LINKS is Salvagnini's IoT solution that monitors the **performance of the cutting system**. It offers access to production data, logbooks, performance KPIs and telemetry, as well as parameter monitoring by the Condition Monitoring process, thus increasing the overall equipment efficiency.

